

Glass Door - FR30/0

Technical Data Sheet

Product Information

Dimensions:

Height up to 3000mm

Fire Ratings:

FR30/0

Thickness:

10mm

Structure:

BS5234; BS6180; BS6399

Profiles:

Frameless

Ironmongery:

Overhead Door Closer, Hinges,
Patch Lock and Lever handle

Glass Type:

Pyran S

Glass Thickness:



10mm

Door Leaf Options:

Single

Options:

Manifestations
Graphics
Aluminium Banding

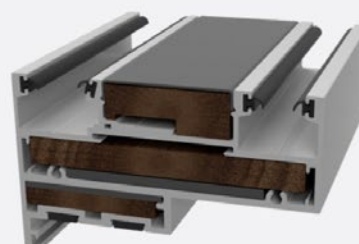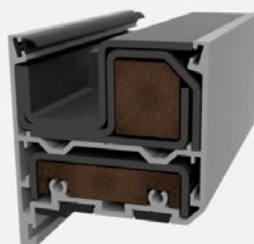

Apton's FR30/0 Glass Door effortlessly blends performance with a sleek, frameless design, offering a minimalist touch. Using 10mm Pyran S glass, our fire rated glass door provides 30 minute integrity and are tested to BS 476 pt22, in an approved UKAS (United Kingdom Accreditation Services) test house, with 3rd party accreditation and field of application obtained through international fire consultants. A FOA is available on request.

British Standards

- Sound Measurements BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Fire Rated Glass Doors are designed by
Apton Partitioning Limited in the UK.

