



## Quartz Linear - Banded

Technical Data Sheet

### Product Information

#### Dimensions:

Height up to 4200mm  
Track Width 27mm/32mm/54mm  
Track Height 27mm/50mm

#### Acoustics:

Up to 55dB (Rw)

#### Structure:

BS5234; BS6180; BS6399

#### Joints:

Dry Joints

#### Corners:

Dry Joint  
(90, 135 & T)

#### Deflection Head:

±12.5mm/±25mm

#### Door Options:

Timber Door  
Glass Door  
Mk1 Door  
Mk2 Door  
GDS Door  
QuartzGlide Sliding Doors

#### Profiles & Door Frames:

Aluminium

#### Ironmongery:

A wide range of ironmongery can be supplied with Quartz

#### Glass Type:

Toughened - Laminated

#### Glass Thickness:



10-19mm

#### Options:

Blinds  
Manifestations/Graphics  
Switch Glass

#### Finishes:

Polyester Powder Coat  
Satin/Special Anodised Aluminium

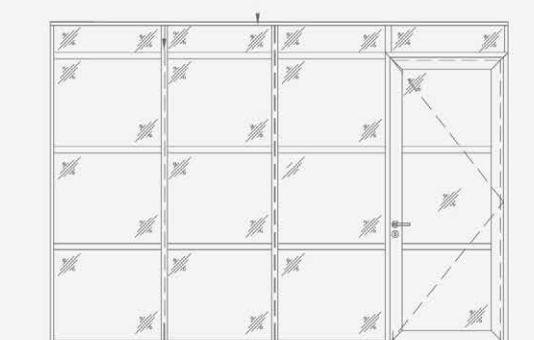

Our Quartz Linear – Aluminium Banded partitioning system seamlessly blends aluminium elegance with a functional design. Available with either our Quartz single or double glazed tracks, Quartz Linear provides an enhanced workplace aesthetic with its industrial framed appearance.

The aluminium strips are available in 2 standard width sizes, all supplied pre-finished, complete with double-sided tape, ready to apply to the glass partition. Bespoke sizing is available on request.

#### British Standards

- Sound Measurements BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Quartz is designed and manufactured by  
Apton Partitioning Limited in the UK.