



Quartz - Single Central

Technical Data Sheet

Product Information

Dimensions:

Height up to 4200mm
Track Width 100mm
Track Height 27mm

Acoustics:

Up to 41dB (Rw)

Structure:

BS5234; BS6180; BS6399

Joints:

Dry Joints

Corners:

Dry Joint (90, 135 & T)

Deflection Head:

±12.5mm/±25mm

Door Options:

Timber Door
Glass Door
Mk1 Door
MK2 Door
GDS Door
QuartzGlide Sliding Doors

Profiles & Door Frames:

Aluminium

Ironmongery:

A wide range of ironmongery can be supplied with Quartz

Glass Type:

Toughened - Laminated

Glass Thickness:



10-19mm

Options:

Manifestations/Graphics
Switch Glass
Aluminium Banding

Finishes:

Polyester Powder Coat
Satin/Special Anodised Aluminium

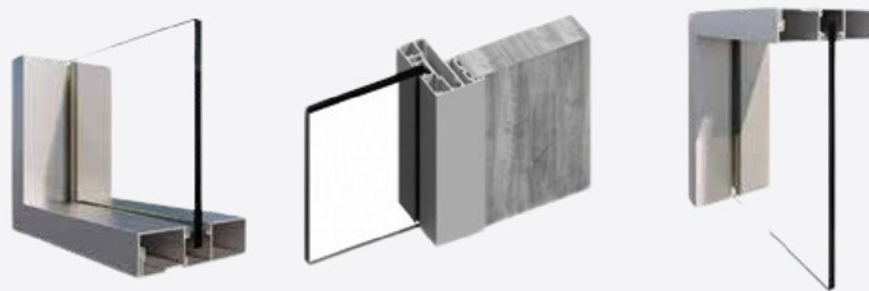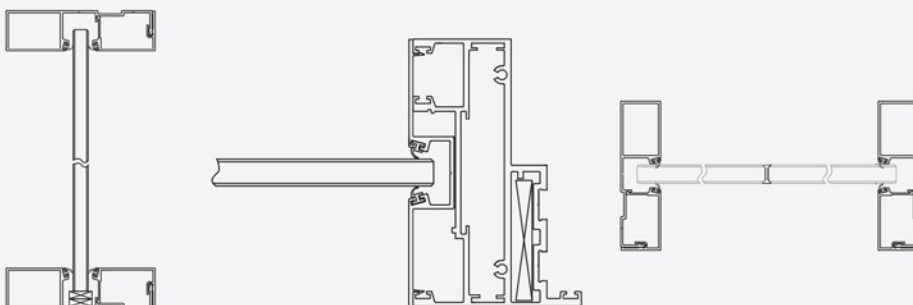

Our single central glazed partitioning system provides an ideal solution for dividing commercial spaces and maintaining a natural and open atmosphere. With the benefit of having the same track width as our double glazed Quartz, this system ensures a seamlessly coordinated design for your space when a mix of single and double glazed partitioning is required.

British Standards

- Sound Measurements BS EN ISO 140
- Sound Rating BS EN ISO 717
- Structural Stability BS5234; BS6180; BS6399



Quartz is designed and manufactured by
Apton Partitioning Limited in the UK.